

## ILFK 12P1501/I06

Inductive sensors special versions

Article number: 10211800

### Overview

- 2 mm
- PNP make function (NO)
- cable, 2 m
- 60 °C
- IP 67



Picture similar



### Technical data

#### General data

Mounting type	Flush
Special type	Inductive code reader
Nominal sensing distance S <sub>n</sub>	2 mm
Hysteresis	0,6 ... 20 % of S <sub>r</sub>

#### Electrical data

Switching frequency	< 2 kHz
Voltage supply range +V <sub>s</sub>	10 ... 30 VDC
Current consumption max. (no load)	20 mA
Output circuit	PNP make function (NO)
Voltage drop V <sub>d</sub>	< 2 VDC
Output current	< 200 mA

#### Electrical data

Short circuit protection	Yes
Reverse polarity protection	Yes

#### Mechanical data

Type	Rectangular
Material (sensing face)	PA 6
Housing material	PA 6
Dimension	30 mm
Housing length	79 mm
Connection types	Cable, 2 m

#### Ambient conditions


Operating temperature	0 ... +60 °C
Protection class	IP 67

### Remarks

- Reduced wiring
- PA 6 plastic body

# ILFK 12P1501/I06

## Dimension drawing

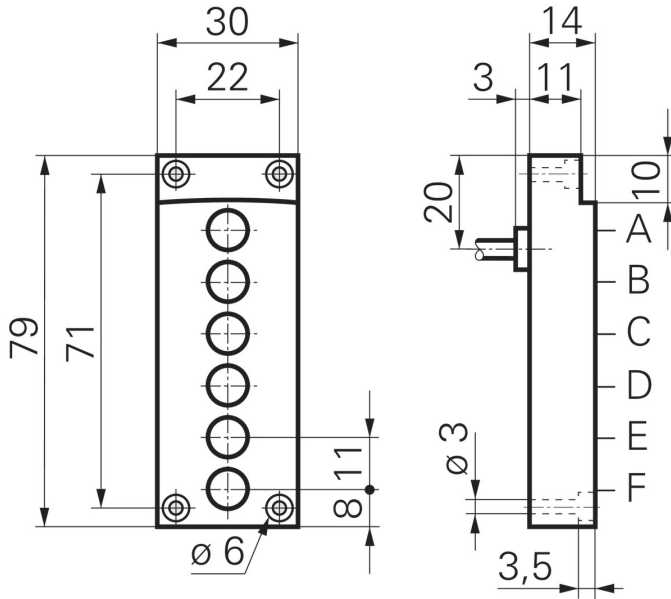

## Connection diagram

