

## OZDK 10N5150

Diffuse sensors with intensity difference - miniature

Article number: 10163205

### Overview

- intensity difference
- 3 ... 150 mm
- pulsed red laser diode
- NPN
- potentiometer, 5 turn
- cable 4 pin, 2 m
- -10 ... 50 °C
- IP 65



Picture similar



### Technical data

#### General data

Type	Intensity difference
Version	Line beam
Light source	Pulsed red laser diode
Sensing distance Tw	3 ... 150 mm
Optimum operating distance	35 ... 45 mm
Repeat accuracy	< 0,2 mm at laser focus
Power on indication	LED green
Light indicator	LED yellow
Sensitivity adjustment	Potentiometer, 5 turn
Laser class	1
Distance to focus	40 mm
Wave length	650 nm

#### Electrical data

Response time / release time	< 0,05 ms
Voltage supply range +Vs	10 ... 30 VDC
Current consumption max. (no load)	50 mA

#### Electrical data

Current consumption typ.	40 mA
Voltage drop Vd	< 1,8 VDC
Output function	Light / dark operate
Output circuit	NPN
Output current	< 100 mA
Short circuit protection	Yes
Reverse polarity protection	Yes

#### Mechanical data

Width / diameter	10,4 mm
Height / length	27 mm
Depth	16,3 mm
Type	Rectangular
Housing material	Plastic (ASA)
Front (optics)	PMMA
Connection types	Cable 4 pin, 2 m

#### Ambient conditions


Operating temperature	-10 ... +50 °C
Protection class	IP 65

# OZDK 10N5150


Diffuse sensors with intensity difference - miniature

Article number: 10163205


## Dimension drawing

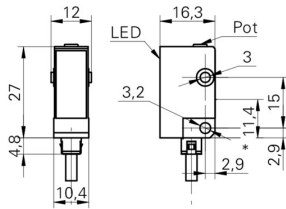

## Relative receiving signal

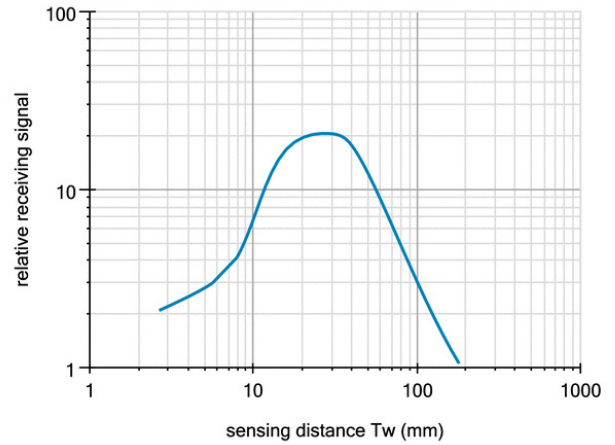

## Connection diagram

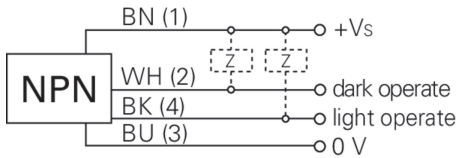

## Laser warning

**CLASS 1 LASER  
PRODUCT**

IEC 60825-1/2014  
Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed. 3., as described in Laser Notice No. 56, dated May 8, 2019

## Beam characteristic (typically)

