

# O300.RL-GW1J.72CU

Retro-reflective sensors - miniature

Article number: 11172767

## Overview

- retro-reflective sensor
- 5 m
- pulsed red laser diode
- push-pull
- Teach-in and IO-Link
- cable 4 pin, 2 m
- -10 ... 60 °C
- IP 67



Picture similar



## Technical data

### General data

Type	Retro-reflective sensor
Light source	Pulsed red laser diode
Actual range Sb	5 m
Nominal range Sn	6 m
Repeat accuracy	< 0,2 mm at 500 mm
Polarization filter	Yes
Light indicator	LED yellow
Power on indication	LED green
Sensitivity adjustment	Teach-in and IO-Link
Laser class	1
Distance to focus	Parallel beam
Wave length	656 nm
Suppression of reciprocal influence	Yes
Alignment optical axis	< 2°

### Electrical data

Response time / release time	< 0,1 ms
Voltage supply range +Vs	11 ... 30 VDC
Current consumption max. (no load)	30 mA

### Electrical data

Current consumption typ.	25 mA
Voltage drop Vd	< 2,5 VDC
Output function	Light / dark operate
Output circuit	Push-pull
Output current	< 100 mA
Short circuit protection	Yes
Reverse polarity protection	Yes

### Mechanical data

Width / diameter	12,9 mm
Height / length	32,3 mm
Depth	23 mm
Type	Rectangular
Housing material	Plastic (ASA, PMMA)
Front (optics)	PMMA
Connection types	Cable 4 pin, 2 m

### Ambient conditions

Operating temperature	-10 ... +60 °C
Protection class	IP 67

## Remarks


- qTeach
- IO-Link: V1.1, filter functions, qTeach lock adjustable

# O300.RL-GW1J.72CU


Retro-reflective sensors - miniature

Article number: 11172767

### Dimension drawing

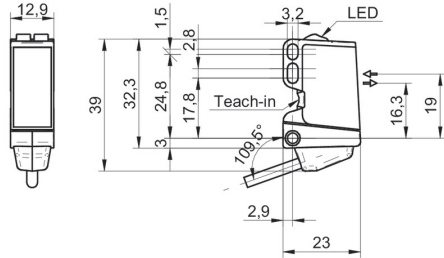

### Connection diagram

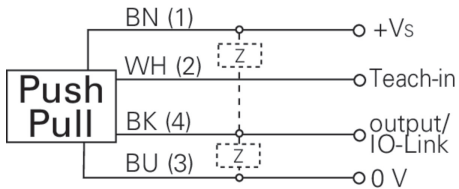


### Laser warning

**CLASS 1 LASER  
PRODUCT**

IEC 60825-1/2014  
Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed. 3., as described in Laser Notice No. 56, dated May 8, 2019

### Beam characteristic (typically)

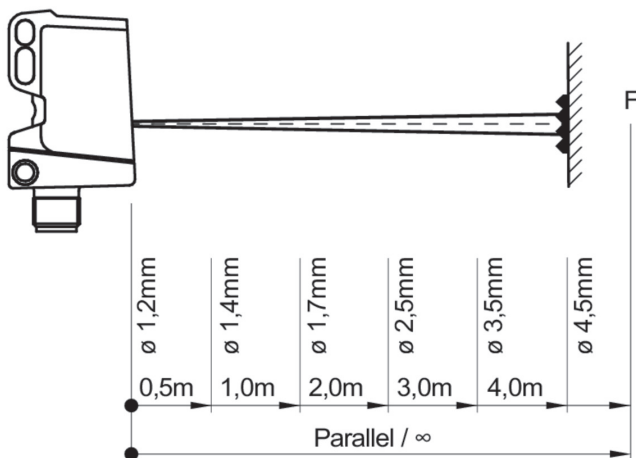

### Excess gain curve

